



**INSULATION LEVEL**  
600 V; BIL 10kV full wave

**FREQUENCY**  
60 Hz.

**ACCURACY CLASS**  
0.6W, 1.2X @ 60 Hz

**THERMAL RATINGS**  
150VA @ 30 deg. C ambient  
100VA @ 55 deg. C ambient

**OUTER ENCAPSULATION**  
Thermoplastic Shell

**TERMINALS**  
Brass studs No 10-32 UNC with one flat washer, lockwasher and regular nut.

**APPROX. WEIGHT**  
7.75 lbs.

**CUSTOM OPTIONS (CONTACT US)**

- Different Ratios
- Different encapsulation (epoxy resin,tape etc.)
- Different secondary termination
- Special electrical/mechanical/mounting needs possible
- Customer specific secondary voltages possible



- **UL, cUL Recognized and CSA Certified**
- **As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard**



**TABLE:**

CATALOG NUMBER	VOLTAGE RATING	TURNS RATIO	RECOMMENDED SECONDARY FUSE RATING
PT100-069	69.3:120	0.58:1	1.6 Amp
PT100-120	120:120	1:1	1.6 Amp
PT100-208	208:120	1.73:1	1.6 Amp
PT100-240	240:120	2.1	1.6 Amp
PT100-277	277:120	2.31:1	1.6 Amp
PT100-288	288:120	2.4:1	1.6 Amp
PT100-300	300:120	2.5:1	1.6 Amp
PT100-346	346:120	2.88:1	1.6 Amp
PT100-480	480:120	4:1	1.6 Amp
PT100-600	600:120 :	5:1	1.6 Amp

**S.A.E.L. S.r.l.**

STRUMENTAZIONE APPARECCHIATURE ELETTRONICHE  
Via Romagna, 1/3 - 20090 Segrate (Milano)  
Tel. +39 02 2139902 - Fax +39 02 2135573  
E-mail: info@saelsrl.com - www.saelsrl.com

**DIMENSIONS:**

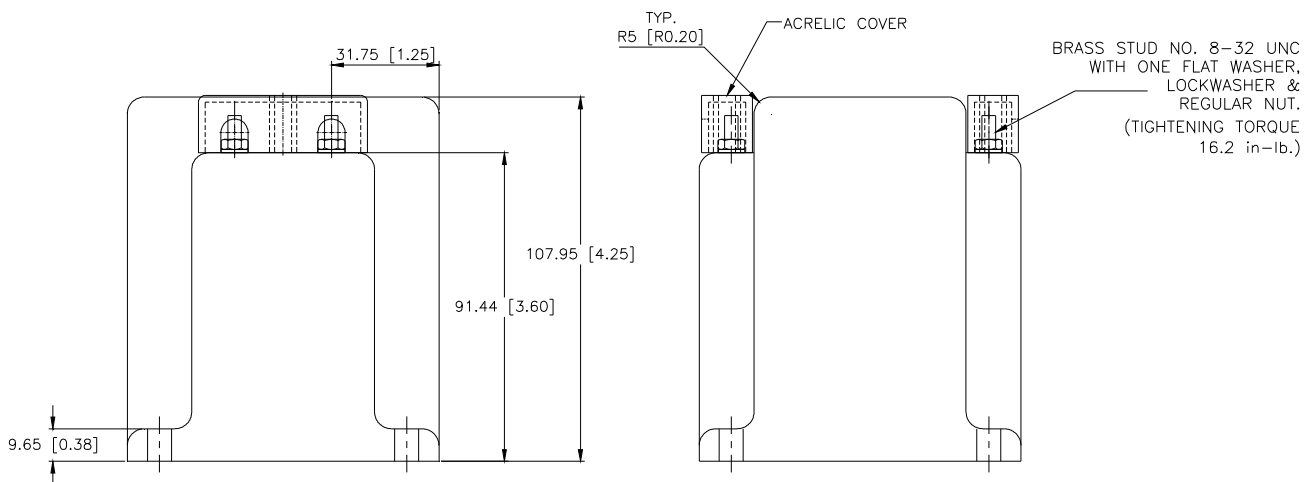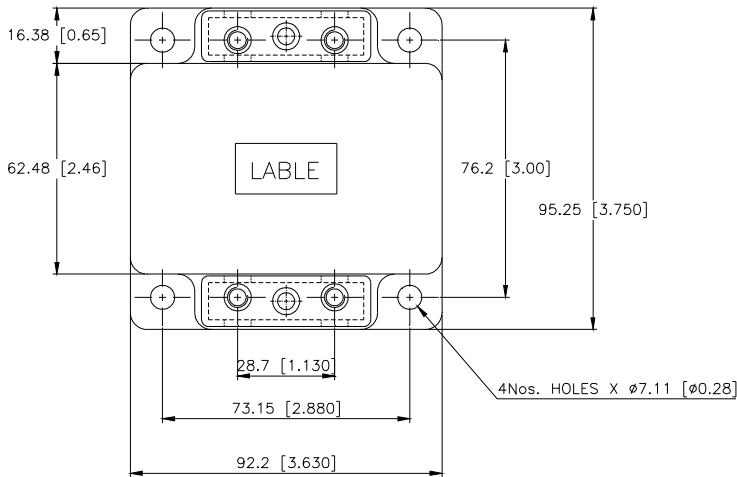

All dimensions are in mm [inches]

**S.A.E.L. S.r.l.**

STRUMENTAZIONE APPARECCHIATURE ELETTRONICHE  
Via Romagna, 1/3 - 20090 Segrate (Milano)  
Tel. +39 02 2139902 - Fax +39 02 2135573  
E-mail: info@saelsrl.com - www.saelsrl.com